

Print now.
Print More.



New Trusted Identity Begins


SOLID-810L is a new-generation retransfer card printer that offers the industry's fastest issuance speed. IDP's innovative retransfer heating technology- RapidRetransfer Printing technology or "RRP" provides the fastest "Ready to Print" metric in the industry. No more waiting several minutes for your outdated retransfer printer to heat up.

RRP technology from IDP offers power-on and Ready to Print in only seconds. The SOLID-810L produces higher quality, sharper-looking images than traditional card printers. It is the perfect choice for demanding applications that require deep dark colors with infinity-edge (full-bleed) graphics on blank or technology cards.

The input card hopper holds up to 200 cards and physical security features allow you to secure your printer, its supplies, and ejected cards in instant bank card issuance or high-security applications.

Features

- The FASTEST First-Card-Out speed
- High-Security Holographic Laminate
- High Volume Capacity (200 cards)
- Infinity Edge / Over the Edge Printing
- Patch or Edge-to-Edge Laminating
- Advanced Bank Card Issuance Security
- Robust & Innovative Product design

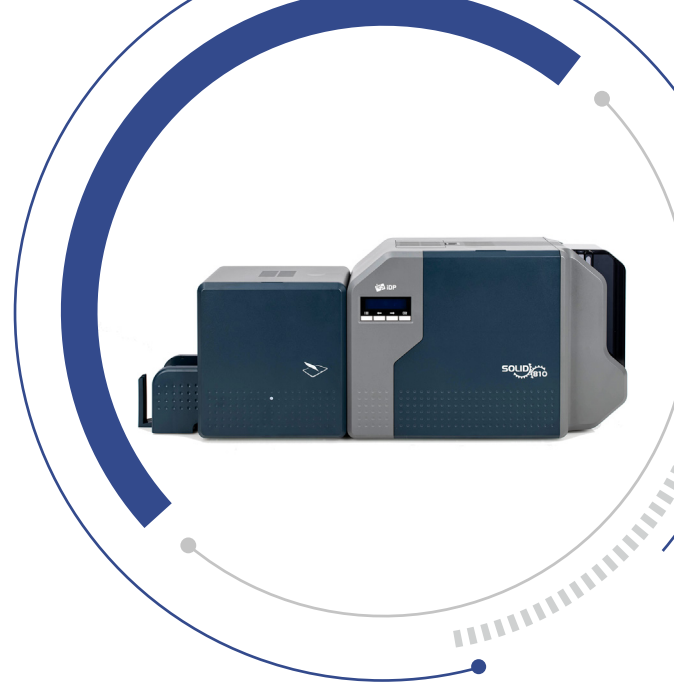

Issuance

SMART IDesigner ensures accurate card issuance and data management with your SOLID series of printers. This application offers simple design tools to allow the user to create a truly customized card within minutes. SMART IDesigner offers advanced user tools such as database connections, camera and signature scanners, plug-in support, as well as smart card reading and encoding.

- Design and print (Image, Photo, and Text)
- 1D & 2D Barcode printing
- Auto portrait (Auto face detection, adjustment of size & position)
- Printing of sequential numbers
- Card design templates
- Plug-in for supporting external devices (Sign pad, Camera, Scanner)
- Convenient card issuance and data management
- Magnetic stripe (MS), contact & contactless smart card encoding by using a plug-in program

Security

The SOLID series printers come with highly effective and tested physical and electronic security features.

- PASSWORD verification with administrator and user authentications
- PC AUTHENTICATION locks the SOLID printer to a specific PC to render it useless if stolen
- DATA ENCRYPTION over USB and SSL (secure socket layer) over Ethernet
- PHYSICAL LOCKS are standard on the SMART-70 and an optional feature on the SOLID-510 Series
- Ethernet - SNMPv3

Networking

The SOLID series offers "single-wire" printing and encoding.

- The SOLID Ethernet module can not only print over your network, but can also be configured to encode a magnetic stripe, contact IC chips, and contactless smart cards over your network
- The SOLID Ethernet module can be configured to accept "open card protocol" print commands for direct printing without a driver

Printing

| | |
|------------|--|
| Print Type | Dye-Sublimation / Resin Thermal Retransfer |
| Print Area | Edge-to-Edge |
| Resolution | 300dpi / 600dpi |

Print Speed

| | |
|------------------|-----------------------------------|
| YMCKK | Max. 43 sec./card (84 cards/hour) |
| YMCKK/Laminating | Max. 51 sec./card (71 cards/hour) |

System

| | |
|----------------------|---|
| Display | 2 Line Graphic LCD Indicator / 4 Buttons |
| Supported Platforms | Microsoft Windows /7/8/10, 11, Mac OS, Linux |
| Communication | USB, Ethernet |
| Power Supply | 100-240V~ 50/60Hz 2.5A |
| Temperature/Humidity | 15~35°C/35~70% |

Certifications

CB CE FCC ENEC

Laminating

| | |
|---|-------------------------------|
| Type | Direct Heating Lamination |
| Film (clear & holographic) | 0.6mil, 1.0mil |
| Film Thickness | 0.6mil, 1.0 mil |
| Type | Direct Heating Lamination |
| Speed Simultaneous (Single Lamination) | 20 sec./card (180 cards/hour) |
| Interface | 1 LED indicator |
| Communication | IR type |

Consumables



Color
Ribbons

YMCK

Full Color Ribbon
with Resin Black

500 Cards/Roll

YMCKK

Full Color Ribbon with
Resin Black & Resin
Black for Back Side

500 Cards/Roll



Retransfer
Film

Retransfer Film

500 Cards/Roll

Card

| | |
|----------------|--------------------------------------|
| Card Feeding | Automatic |
| Card Size | ISO CR80 (54mm x 86mm/2.12" x 3.38") |
| Card Thickness | 0.76mm (30mil) ~ 1.6mm (64mil) |
| Card Type | PVC, PC, PET, Composite PVC |

Capacity

| | |
|---------------|-----------|
| Input Hopper | 200 Cards |
| Output Hopper | 100 Cards |

Dimensions

| | |
|--------------------|---|
| Millimeter (WxDxH) | (Printer) 460 x 224 x 310mm (Laminator) 240 x 224 x 260mm |
| Inch (WxDxH) | 18.1 x 8.8 x 12.2 |

Weight

| | |
|--------|---|
| Kg/lbs | (Printer) 11.4 / 25.13 (Laminator) 6.2 / 13.7 |
|--------|---|

Encoding Options

| | |
|-------------|---|
| Magnetic | ISO 7811 (Track I, II, III Read/ Write, HiCo/ LoCo) |
| Contact | ISO 7816 (ID-1) |
| Contactless | ISO 14443 (Type A/ B), ISO 18092(NFC), MIFARE, DESFIRE |
| Security | Physical & Electronic Locking System |



IDP Americas, Inc.

1485 South County Trail - Unit 306,
East Greenwich, RI 02818
TEL +1.401.400.7111
FAX +1.401.667.7445
E-MAIL sales@idpamericas.com

IDP Corp., Ltd.

#601, 50, Digital-ro 33-gil,
Guro-gu, Seoul, Korea, 08377
TEL +82.2.6099.3700
FAX +82.2.6099.3717
E-MAIL sales@idp-corp.com

| | |
|------------------------------------|--------|
| SOLID-810L | 653671 |
| Contactless Enc. (USB) | 653540 |
| Contact IC Enc. | 653539 |
| Mag Encoding | 653538 |
| YMCK (retransfer film pack) | 653548 |
| YMCKK (no film included) | 653550 |
| Retransfer INTM Film | 653551 |
| Clear 1mil Laminate Film | 659609 |
| Secure Globe 1 mil Film | 900828 |

*Warranty: IDP printers and options are warranted against manufacturer defects for up to 3 years and print heads for up to 2 years with unlimited prints. Additionally, IDP offers a 3-Year Advance Exchange warranty within the continental USA. Contact IDP for more details.

www.idp-corp.com